


ADHESIVES

FOR THE GRAPHICS INDUSTRY

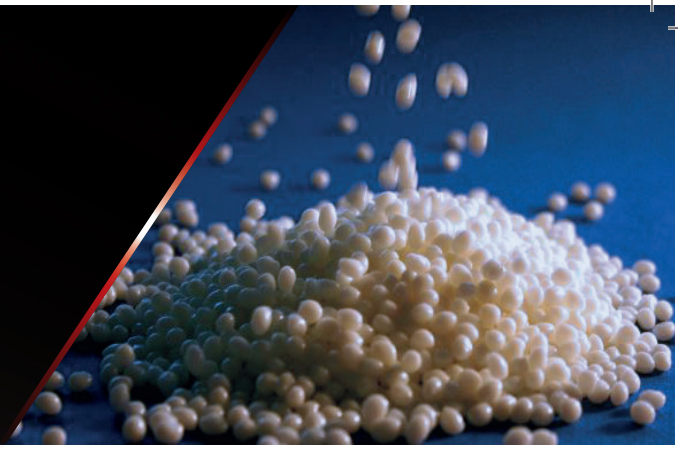

Klebstoffe für die grafische Industrie


DE Bücher sind aus unserem Alltag nicht wegzudenken und müssen im täglichen Gebrauch höchste Ansprüche erfüllen. Dafür passen wir unsere Klebstoffe individuell an Ihre Produktionsbedingungen an - für eine effiziente Fertigung mit optimalen Ergebnissen.

Egal ob Vor- und Hauptleime für die Herstellung von Katalogen und Broschüren im One und Two Shot-Verfahren oder Klebebindung, Seitenbeileimung oder Einhängen: Mit unseren FOLCO MELT Schmelzklebstoffen und unseren füllstofffreien FOLCO LIT Dispersionen ist für jede Anwendung ein passendes Produkt dabei. Zudem sind unsere Klebstoffe gesundheitlich unbedenklich und nachhaltig und sorgen so für ein angenehmeres Arbeitsumfeld sowie für Produkte mit einer verbesserten Öko-Bilanz.

Adhesives for the graphics industry

EN Books are an essential part of everyday life and must meet the highest standards in daily use. We adapt our adhesives individually to your production conditions for efficient production with optimal results.

Whether pre- and main glues for the production of catalogues and brochures in one- and two-shot process, adhesive-binding, side gluing or hanging: with our FOLCO MELT hotmelt adhesives and filler-free FOLCO LIT dispersions, there is a suitable product for every application. In addition, our adhesives are harmless to health and sustainable, thus ensuring a more pleasant working environment and products with an improved ecological balance.

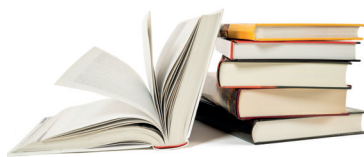

Produktbeispiel: Verlässliche Klebstoffe für anspruchsvolle Buchklebungen.

Product sample: Reliable adhesives for demanding book gluing.

Ihre Vorteile

- DE** + Saubere Laufeigenschaften garantieren Produkte ohne Nacharbeit
- + Hohe Anfangsfestigkeit und Klammerwirkung für schnelle Prozesszeiten, kostenoptimierte Produktion und effiziente Fertigung
- + Exzellente Adhäsionseigenschaften bieten eine verlässliche Klebung für hochbelastbare Endprodukte
- + Thermische Stabilität der Schmelze führt zu einer Verringerung der Anlagenwartung

Your benefits

- EN** + Clean flow properties guarantee products that require no reworking
- + High initial strength and clamping effect for fast process times, cost-optimised production and efficient manufacturing
- + Excellent adhesion properties ensure reliable bonding for heavy-duty end products
- + Thermal stability of the melt leads to a reduction in plant maintenance

- + **Saubere Laufeigenschaften**
- + Clean flow properties
- + **Kostenoptimierte Produktion**
- + Cost-optimised production
- + **Verlässliche Klebung**
- + Excellent adhesion properties

ADHESIVES FOR THE GRAPHICS INDUSTRY

	Name	Viscosity	Softening point	Application area	Characteristics
EVA-based hotmelt	FOLCO MELT BB 1240 C	2.700 mPa.s at 160 °C	76 °C	Especially as a primer and mainglue	Coolmelt with very good melt stability, good melting properties, high clamping effect
	FOLCO MELT PSA H 1125/6	2.000 mPa.s at 160 °C	85 °C	Especially as a side glue	Clean running properties with high initial tack and very long open time, for difficult surfaces
	FOLCO MELT BB 2239	1.700 mPa.s at 160 °C	77 °C	Especially as a side glue	Clean running properties with high initial tack, good melt stability
	FOLCO MELT BB 2240 C	1.700 mPa.s at 160 °C	78 °C	Especially as a primer and mainglue	Coolmelt with very good thermal stability, good melting properties, good heat resistance
	FOLCO MELT BB 7353	4.700 mPa.s at 160 °C	103 °C	Especially as a primer and mainglue	Extraordinary lay-flat behavior
	FOLCO MELT BB 2338 L	4.500 mPa.s at 160 °C	76 °C	Especially as a side glue	Clean running properties with high initial tack, good melt stability
	FOLCO MELT BB 2339 TB	5.000 mPa.s at 160 °C	78 °C	For one- or two-shot application	Good thermal stability, high initial strength, good layflat-performance
	FOLCO MELT H 3100	1.400 mPa.s at 160 °C	84 °C	Mainglue	Synthetic rubber based, low tack peelable hotmelt, excellent machining properties

	Name	Viscosity	Application area	Characteristics
Unfilled dispersion based on EVA copolymers	FOLCO LIT BL 9004	3.000 mPa.s	Bookbinding industry: especially for casing-in of books	Allows a good „Wet-Tack“ with at same time high initial strength

For further information and additional product offerings please refer to our product information sheets or contact our experts **P** + 49 571 9339-255 / **E** adhesives@follmann.com.